


Manhole Cover **AX-S** Class **D400**
 Square frame – Safety – Non Ventilated

KITEMARK

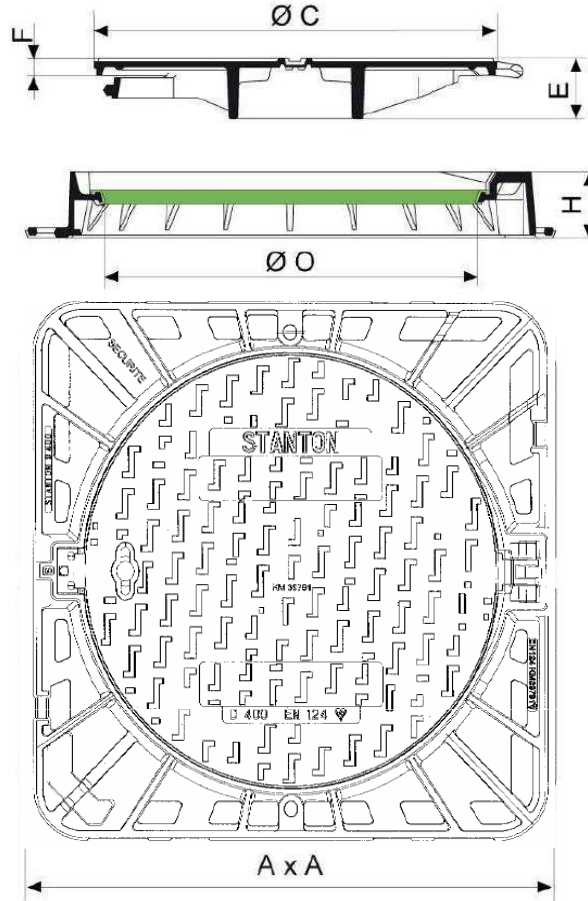

Type	A	O	H	Weight
Square	850 mm	600 mm	100 mm	65 kg

Material and coating :

Description	Material	Coating
Cover and Frame	Ductile iron EN GJS 400-15	Water base
Gasket	Polyéthylène	-

Domain of use :

- **Group 4 (class D 400) in accordance with EN124 standard:** Carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles
- Normal traffic and periodic inspections.

Characteristics:

- Automatic locking by ductile iron spring bar.
- Hinged cover, opens to 110 °; blocks at 90° when closing .
- Optimized frame for bedding.
- Optional cover anti-theft spline (disable the 90° blocking function)
- Optional locking system.